ADITYA SERIESWSP-360 TO WSP-365





Superior module efficiency as per international benchmarks



1500 VDC system voltage for lower BoS cost



Glass with anti reflective coating improves light transmission



Salt mist, blowing sand and hail resistant




PID resistant with long term reliability




Sustain heavy wind & snow loads (2400 pa & 5400 pa)




Modules binned by current to improve system performance

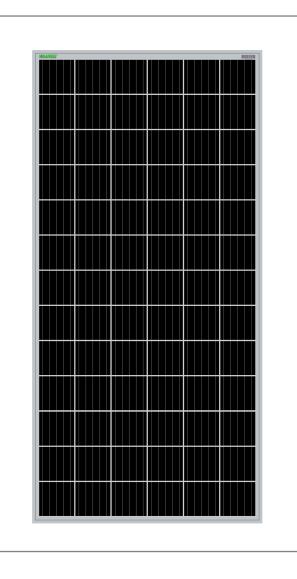


I-V VARIATION WITH IRRADIANCE

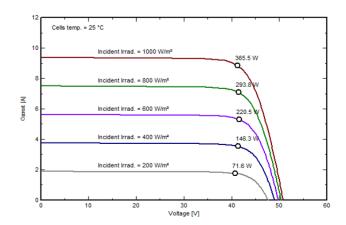

I-V VARIATION WITH TEMPERATURE

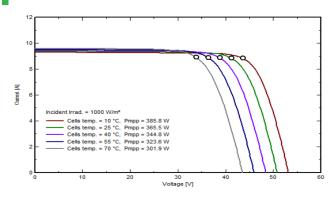

The Graphs are for reference purpose only. Please consult Waaree technical team for further clarifications.

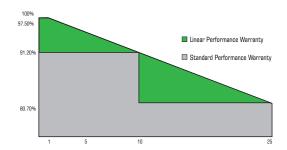

ARKA SERIES

WSP-360 TO WSP-365



ELECTRICAL CHARACTERISTICS

| Models | Pmax (W) | | Vmp (V) | | Imp (A) | | Isc (A) | | Voc (V) | | Module Eff. (%) |
|----------|----------|-------|---------|-------|---------|------|---------|------|---------|-------|--------------------|
| IVIOUEIS | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT | STC | NOCT | iviouule EII. (90) |
| WSP-360 | 360 | 267.2 | 41.28 | 37.80 | 8.73 | 7.07 | 9.33 | 7.55 | 50.70 | 46.90 | 16.74 |
| WSP-365 | 365 | 270.4 | 41.44 | 38.00 | 8.82 | 7.12 | 9.38 | 7.59 | 50.81 | 47.00 | 16.97 |


^{*}Standard Test Conditions (STC) - 1000 W/m2 irradiance, Air Mass 1.5 and 25°C cell temperature. Nominal Operating Cell Temperature (NOCT) - 800 W/m2 irradiance, Air Mass 1.5, Ambient temperature 20°C and Wind speed 1 m/s. Average power reduction of 4.5% at 200 W/m2 as per IEC 60904-1. Measuring Uncertainty ± 3%.

| | | _ | | |
|----------------|--------|---|--------------------|------|
| System Voltage | 1500 V | | Series Fuse Rating | 16 A |

MECHANICAL CHARACTERISTICS

| Length x Width x Thickness (L x W x T) | 2145 mm (L) x 1003 mm (W) x 40 mm (T) |
|--|---|
| Weight | 24.5 kgs |
| Solar Cells per Module (Units) / Arrangement | 78 / (13x6) |
| Solar Cell Type | Poly crystalline |
| Front Glass | 3.2 mm Low Iron and Tempered glass with ARC coating |
| Encapsulate | PID Free & UV Resistant |
| Junction Box (Protection degree / Material) | IP67/ IP68 rated / Weatherproof PPO |
| Connector (Protection degree / Type) | IP68 rated / MC4 compatible |
| Cable Cross - Section & Length | 4 mm² & 1200mm |
| Frame | Anodized Aluminium Alloy |

DESIGN SPECIFICATIONS

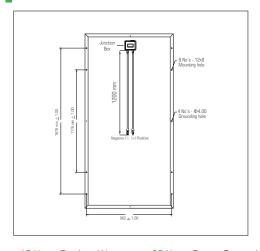

THERMAL CHARACTERISTICS

| Temperature coefficient of Current (Isc), α (%/°C) | 0.05 |
|--|---------------|
| Temperature coefficient of Voltage (Voc), ß (%/°C) | -0.28 |
| Temperature coefficient of Power (Pm), γ (%/°C) | -0.38 |
| NOCT (°C) | 46 <u>+</u> 2 |
| Operating temperature range (°C) | -40 to 85 |

Waaree Energies Ltd. is amongst the top Solar Energy Companies and has the country's largest Solar PV Module manufacturing capacity of 2 GW. In addition, it is committed to provide top notch EPC services, project development, rooftop solutions, solar water pumps and also in an Independent Power Producer. Waaree has its presence in over 325 + 1 locations nationally and 68 countries globally.

10 Years Product Warranty • 25 Years Power Output Warranty

- The electrical data given here is for reference purpose only.
- $\bullet \ \ {\sf Please \ confirm \ your \ exact \ requirements \ with \ the \ sales \ representative \ while \ placing \ your \ order.}$
- Refer installation Manual instructions & Waaree warranty statement for terms & conditions.
- Waaree Reserves the right to change the specifications without prior notice.

www.waaree.com

^{*}If you need specific product certificates, and if module installations are to deviate from our guidance specified in our installation manual, please contact your local Waaree sales and technical representatives.