

# WFLW-165

## FLW MONO PERC



Ultra Light Weight



Higher Open Circuit Voltage



Low Series Resistance




Easy & Quick to Install




Easily Mounted with Number of Options




Low System Installation Cost



Superior Low Light & Low Sun Angle Performance

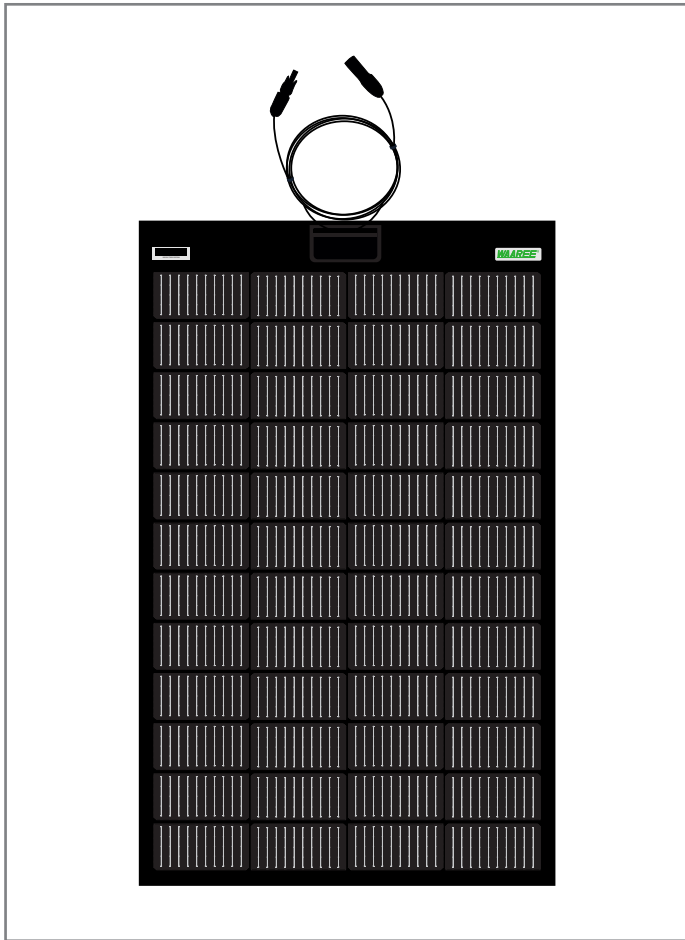

## CHARACTERISTICS CURVES

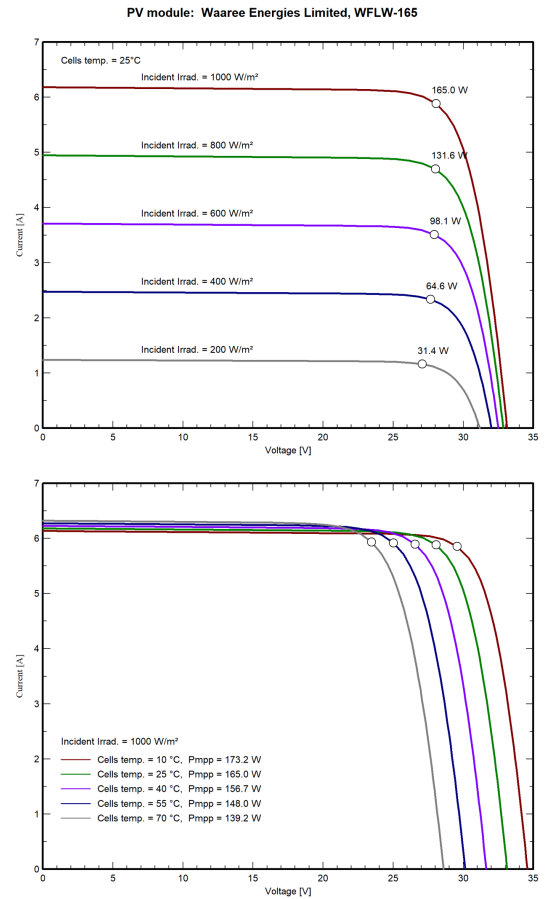

## CERTIFICATIONS AND WARRANTY

Fire Safety Class	Class C
Material & Workmanship Warranty	5 Years *
Power Output Warranty	15 Years*

For Non Roofing 2 Years of workmanship and 5 Years on Power output  
For roofing 5 Years of workmanship and 15 Years on Power Output

## TEMPERATURE COEFFICIENT

TkVoltage	-0.36%/k
Tkcurrent	+0.07%/k
TkPower	-0.38%/K

# WFLW-165

## FLW MONO PERC

### ELECTRICAL PROPERTIES (STC\*)

Model Number	WFLW-165
Rated Power Pmax (Watt)	167
Number of Cells in Series (Nos.)	48
Open Circuit Voltage Voc (Volts)	33.12
Max Peak Voltage Vmp (Volts)	28.32
Max Peak Current Imp (Amps)	5.90
Short Circuit Current Isc (Amps)	6.18
FF(%)	81.63%
Active Area Efficiency (%)	21.02%
Module Efficiency (%)	17.14%
Power Tolerance	±3%
Max Series Fuse Rating (Amps)	20
Operating Temperature	-40°C to +85°C


### MECHANICAL PROPERTIES

Solar cells Arrangement	12X4
Solar Cells	M10 Mono Perc
Panel length (mm)	1240
Panel width(mm)	786
Panel Weight (Kg)	5.0±0.5
Cell Size (mm)	91X182 HC
Max System Voltage Vdc (Volts)	1000
Junction Box Rating	IP67
Connector Type	MC4
Superstrate Type	ETFE Polymer
Junction Box	Front Side
Laminate Thickness (mm)	3.2
Module thickness with Jbox (mm)	22

### MODULES DIMENSIONS



SIDE VIEW

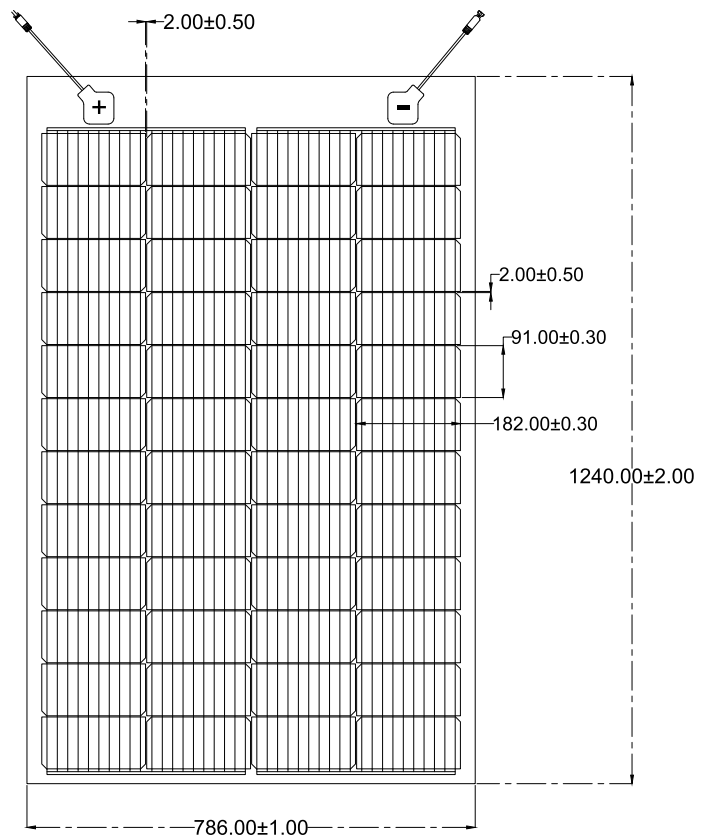

FRONT VIEW