

ELITE SERIES

N-TYPE

BiN-01-555 to BiN-01-585

Framed Dual Glass Bifacial module

WAAREE[®]

One with the Sun



Highest reliability & enhanced crack tolerance MBB module



Sustain heavy snow & wind loads (5400 Pa & 2400 Pa)



Best in class thermal coefficients




Highest commercial gains, lower LCOE




Better weak light performance




Excellent PID resistance

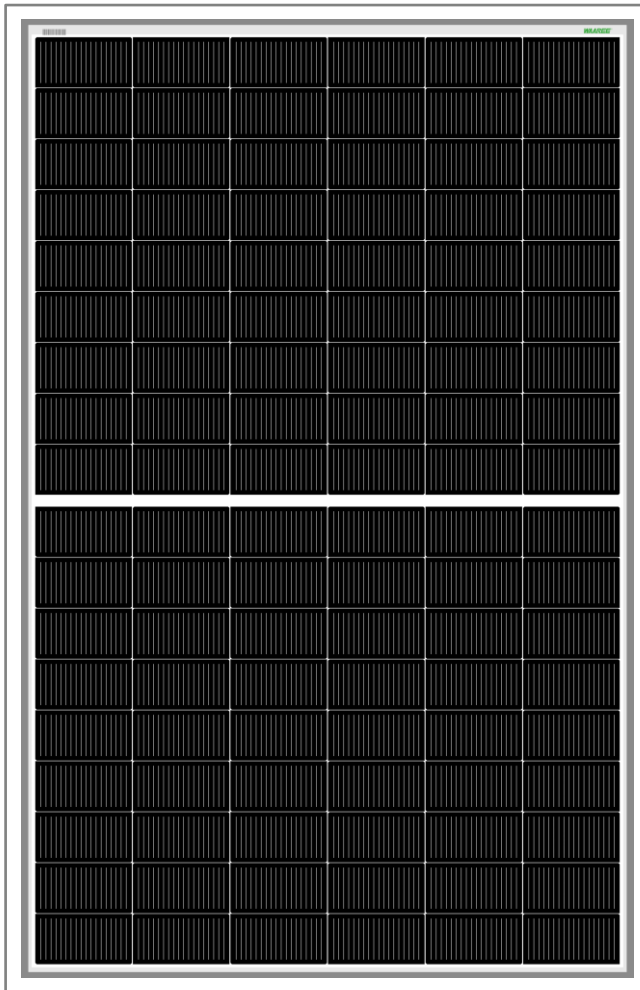


I-V VARIATION WITH IRRADIANCE

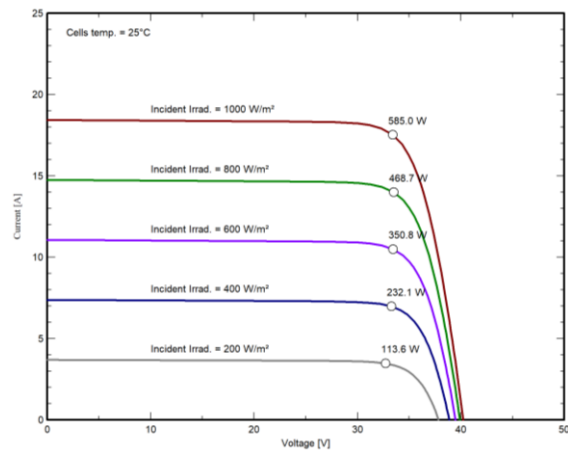

I-V VARIATION WITH TEMPERATURE

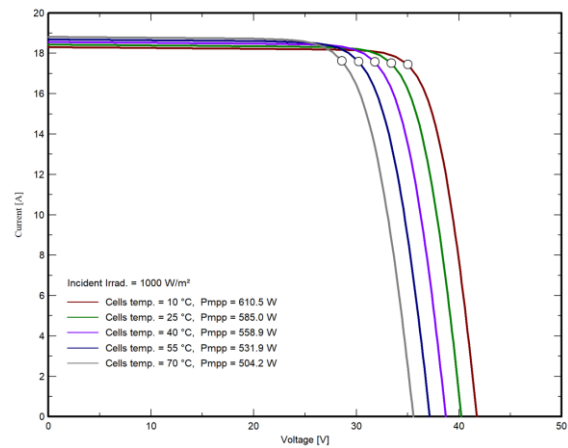

The Graphs are for reference purpose only. Please consult Waaree technical team for further clarifications.

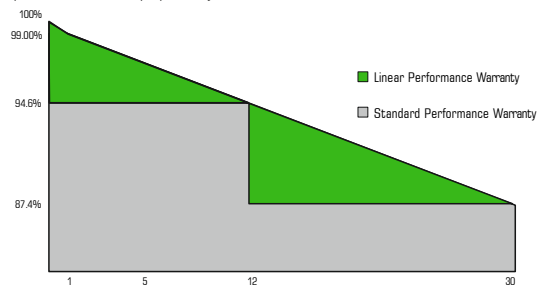

ISO 9001:2015 | ISO 14001:2015 | ISO 45001:2018
Independent assessment of factories by BLACK & VEATCH

www.waaree.com

ELITE SERIES

N-TYPE

BiN-01-555 to BiN-01-585

Framed Dual Glass Bifacial module

WAAREE[®]

One with the Sun

ELECTRICAL CHARACTERISTICS

Models	Pmax (W)		Vmp (V)		Imp (A)		Isc (A)		Voc (V)		Module Eff. (%)
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
BiN-01-555	555	420.70	32.38	30.18	17.14	13.81	18.16	14.64	39.10	37.14	21.68
BiN-01-560	560	424.50	32.60	30.38	17.18	13.85	18.20	14.67	39.26	37.30	21.87
BiN-01-565	565	428.30	32.81	30.58	17.22	13.88	18.24	14.70	39.47	37.50	22.07
BiN-01-570	570	432.10	33.02	30.78	17.26	13.91	18.29	14.75	39.74	37.76	22.26
BiN-01-575	575	435.90	33.22	30.96	17.31	13.95	18.34	14.79	39.91	37.91	22.46
BiN-01-580	580	439.60	33.43	31.16	17.35	13.98	18.39	14.82	40.07	38.06	22.65
BiN-01-585	585	443.40	33.64	31.35	17.39	14.02	18.43	14.85	40.23	38.22	22.85

*Standard Test Conditions (STC) - 1000 W/m² irradiance, Air Mass 1.5 and 25°C cell temperature. Nominal Operating Cell Temperature (NOCT) - 800 W/m² irradiance, Air Mass 1.5, Ambient temperature 20°C and Wind speed 1 m/s. Average power reduction of 4.5% at 200 W/m² as per IEC 60904-1. Measuring Uncertainty ± 3%.


System Voltage	1500 V	Series Fuse Rating	35 A
----------------	--------	--------------------	------

BI-FACIAL OUTPUT - BACKSIDE POWER GAIN*

		BiN-01-555	BiN-01-560	BiN-01-565	BiN-01-570	BiN-01-575	BiN-01-580	BiN-01-585
15%	Power Output (W)	638	644	650	656	661	667	673
	Module Efficiency (%)	24.93	25.15	25.38	25.60	25.83	26.05	26.28
20%	Power Output (W)	666	672	678	684	690	696	702
	Module Efficiency (%)	26.02	26.24	26.48	26.71	26.95	27.18	27.42
25%	Power Output (W)	694	700	706	713	719	725	731
	Module Efficiency (%)	27.10	27.34	27.59	27.83	28.08	28.31	28.56
30%	Power Output (W)	722	728	735	741	748	754	761
	Module Efficiency (%)	28.18	28.43	28.69	28.94	29.20	29.45	29.71

*The bifacial gains are dependent on the power plant design and location

DESIGN SPECIFICATIONS

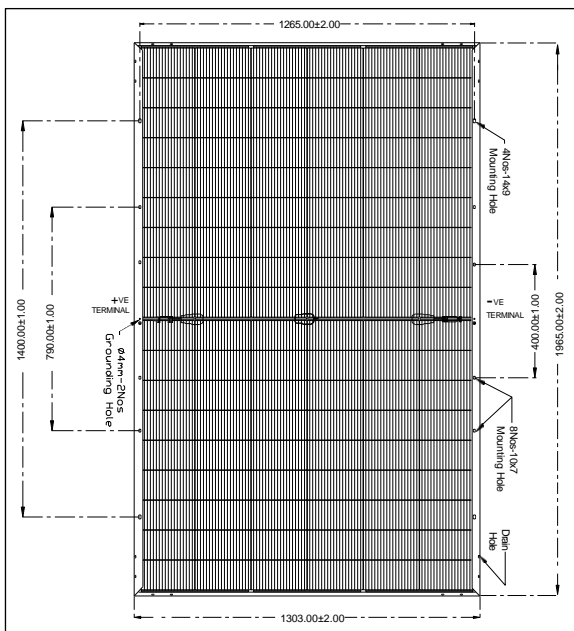

THERMAL CHARACTERISTICS

Temperature coefficient of Current (Isc), α (%/°C)	0.046
Temperature coefficient of Voltage (Voc), β (%/°C)	-0.26
Temperature coefficient of Power (Pm), γ (%/°C)	-0.30
NOCT (°C)	43 ± 2
Operating temperature range (°C)	-40 to 85
Bifaciality	80 ± 10

MECHANICAL CHARACTERISTICS

Length x Width x Thickness (L x W x T)	1965 mm (L) x 1303 mm (W) x 35 mm (T)
Weight	32.5 kgs
Solar Cells per Module (Units) / Arrangement	108 cells / (9x6 9x6)
Solar Cell Type & Size	G12 N-type TOPCon Bifacial
Front Glass (Material / Thickness)	2 mm Low Iron HTAR semi-tempered glass
Back Glass (Material / Thickness)	2 mm Low Iron Printed semi-tempered glass
Encapsulate	PID Free & UV Resistant
Junction Box (Protection degree / Material)	IP68 / Weatherproof PPO, 3 Diodes
Cable & Connector (Protection degree / Type)	IP68 rated / MC4 compatible
Cable cross - section & Length	4 mm ² & 500 mm
Frame	Anodized Aluminium Alloy

Waaree Energies Ltd. is amongst the top Solar Energy Companies and has the country's largest Solar PV Module manufacturing capacity of 12 GW. In addition, it is committed to provide top notch EPC services, project development, rooftop solutions, solar water pumps and also in an Independent Power Producer. Waaree has its presence in over 350+ locations nationally and 68 countries globally.

12 Years Product Warranty • 30 Years Power Output Warranty

- The electrical data given here is for reference purpose only.
- Please confirm your exact requirements with the sales representative while placing your order.
- Refer installation Manual instructions & Waaree warranty statement for terms & conditions.
- Waaree Reserves the right to change the specifications without prior notice.

www.waaree.com