

ELITE SERIES

N-TYPE

WSMT-565 to WSMT-600

Framed Glass White Backsheet Monofacial module

WAAREE[®]

One with the Sun



Highest reliability & enhanced crack tolerance MBB module




Sustain heavy snow & wind loads (5400 Pa & 2400 Pa)



Best in class thermal coefficients




Highest commercial gains, lower LCOE




Better weak light performance




Excellent PID resistance

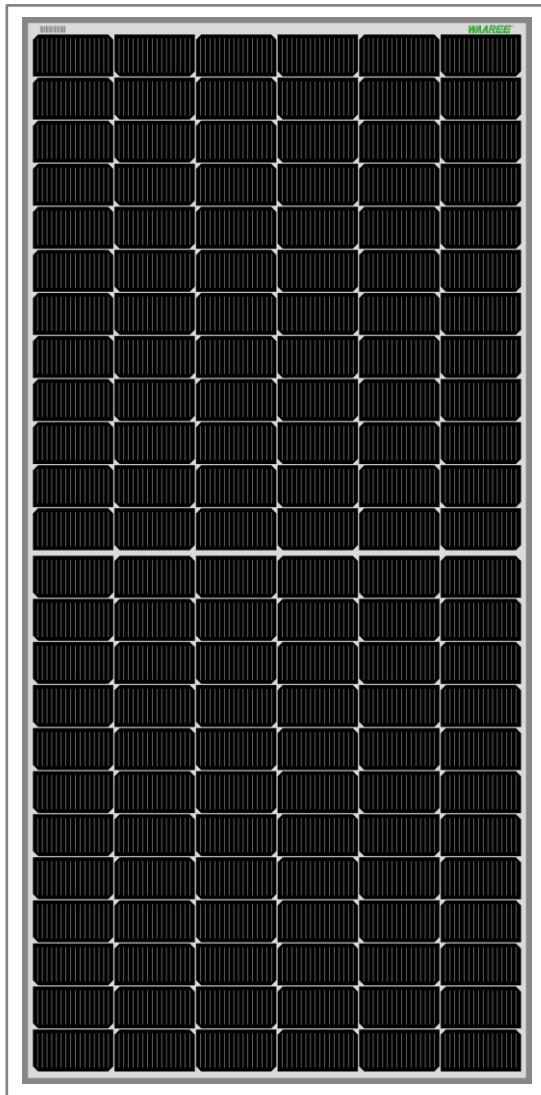


I-V VARIATION WITH IRRADIANCE

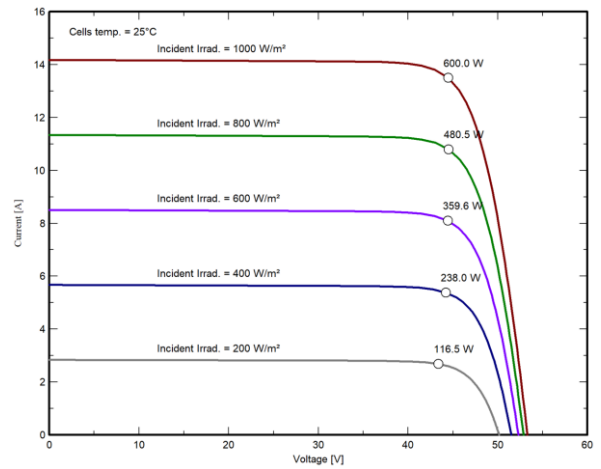

I-V VARIATION WITH TEMPERATURE

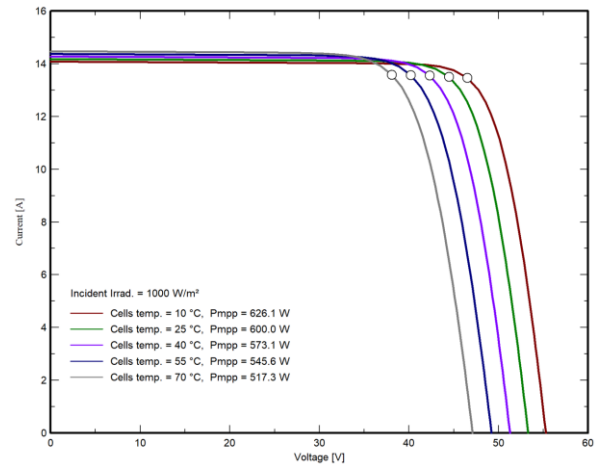

The Graphs are for reference purpose only. Please consult Waaree technical team for further clarifications.

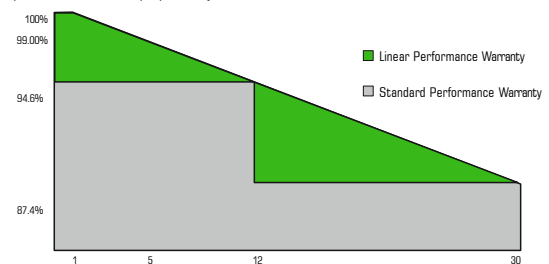

IEC 61215, IEC 61730
UL 61730-1, UL 61730-2

ISO 9001:2015 | ISO 14001:2015 | ISO 45001:2018
Independent assessment of factories by BLACK & VEATCH

ELITE SERIES

N-TYPE

WSMT-565 to WSMT-600

Framed Glass White Backsheet Monofacial module

ELECTRICAL CHARACTERISTICS

	Pmax (W)		Vmp (V)		Imp (A)		Isc (A)		Voc (V)		Module Eff. (%)
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
WSMT-565	565	426.60	43.56	40.60	12.97	10.48	13.75	11.10	51.90	49.31	21.87
WSMT-570	570	430.40	43.71	40.74	13.04	10.54	13.81	11.14	52.10	49.50	22.07
WSMT-575	575	434.10	43.86	40.88	13.11	10.59	13.87	11.19	52.30	49.69	22.26
WSMT-580	580	437.90	44.01	41.01	13.18	10.65	13.93	11.24	52.50	49.88	22.45
WSMT-585	585	441.70	44.15	41.15	13.25	10.71	13.99	11.29	52.70	50.07	22.65
WSMT-590	590	445.50	44.29	41.28	13.32	10.76	14.05	11.34	52.90	50.26	22.84
WSMT-595	595	449.20	44.44	41.41	13.39	10.82	14.11	11.39	53.10	50.45	23.03
WSMT-600	600	453.00	44.61	41.65	13.45	10.88	14.17	11.44	53.30	50.64	23.23

*Standard Test Conditions (STC) - 1000 W/m² irradiance, Air Mass 1.5 and 25°C cell temperature. Nominal Operating Cell Temperature (NOCT) - 800 W/m² irradiance, Air Mass 1.5, Ambient temperature 20°C and Wind speed 1 m/s. Average power reduction of 4.5% at 200 W/m² as per IEC 60904-1. Measuring Uncertainty ± 3%.


System Voltage	1500 V
----------------	--------

Series Fuse Rating	30 A
--------------------	------

THERMAL CHARACTERISTICS

Temperature coefficient of Current (Isc), α (%/°C)	0.046
Temperature coefficient of Voltage (Voc), β (%/°C)	-0.26
Temperature coefficient of Power (Pm), γ (%/°C)	-0.30
NOCT (°C)	43 ± 2
Operating temperature range (°C)	-40 to 85

DESIGN SPECIFICATIONS

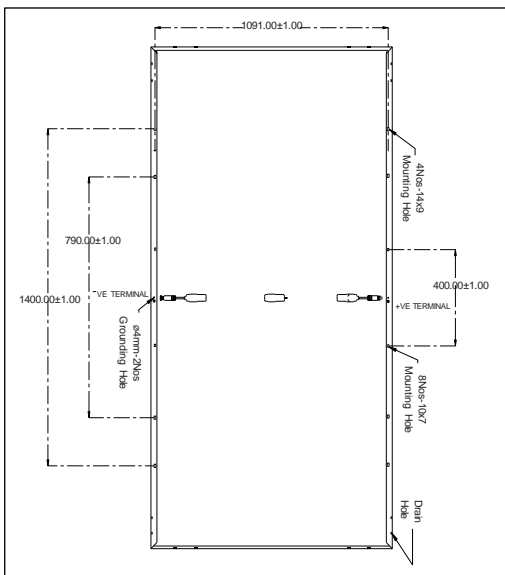

MECHANICAL CHARACTERISTICS

Length x Width x Thickness (L x W x T)	2278 mm (L) x 1134 mm (W) x 33 mm (T)
Weight	27.5 kgs
Solar Cells per Module (Units) / Arrangement	144 cells / (12x6 12x6)
Solar Cell Type & Size	M10/M10R N-type TOPCon Bifacial
Front Glass (Material / Thickness)	3.2 mm Low Iron HTAR Tempered glass
Backsheet	White Backsheet
Encapsulate	PID Free & UV Resistant
Junction Box (Protection degree / Material)	IP68 / Weatherproof PPO
Cable & Connector (Protection degree / Type)	IP68 rated / MC4 compatible
Cable cross - section & Length	4 mm ² & 500mm
Frame	Anodized Aluminium Alloy

Waaree Energies Ltd. is amongst the top Solar Energy Companies and has the country's largest Solar PV Module manufacturing capacity of 12 GW. In addition, it is committed to provide top notch EPC services, project development, rooftop solutions, solar water pumps and also in an Independent Power Producer. Waaree has its presence in over 350+ locations nationally and 68 countries globally

.12 Years Product Warranty • 30 Years Power Output Warranty

- The electrical data given here is for reference purpose only.
- Please confirm your exact requirements with the sales representative while placing your order.
- Refer installation Manual instructions & Waaree warranty statement for terms & conditions.
- Waaree Reserves the right to change the specifications without prior notice.